


CAMCORP MODELS 8SFTR45X64-35P TO 16SFTR84X256-45P

MODEL NUMBER	FILTER AREA (SQ. FT.)			QUAN. OF CARTS	CARTRIDGE LENGTH (INCHES)	DIMENSIONS (INCHES)					EST. INSTALLED WT.
	35 PLEATS	45 PLEATS	60 PLEATS			A	B	C	D	E	
14SFTR45X196	3604	4626	6174	196	45	168 1/2	122 1/2	122 1/2	99 1/2	69	6762
14SFTR60X196	5047	6488	8644		60	183 1/2				84	7264
14SFTR84X196	7209	9271	N/A		80	207 1/2				108	7950
14SFTR45X210	3862	4956	6615	210	45	176	122 1/2	131	107	69	7191
14SFTR60X210	5408	6951	9261		60	191				84	7715
14SFTR84X210	7724	9933	N/A		80	215				108	8428
15SFTR45X225	4138	5310	7088	225	45	176	131	131	107	69	7577
15SFTR60X225	5794	7448	9923		60	191				84	8125
15SFTR84X225	8276	10643	N/A		80	215				108	8866
15SFTR45X240	4414	5664	7560	240	45	183	131	139 1/2	114	69	7962
15SFTR60X240	6180	7944	10584		60	198				84	8533
15SFTR84X240	8827	11352	N/A		80	222				108	9302
16SFTR45X256	4708	6042	8064	256	45	183	139 1/2	139 1/2	114	69	8341
16SFTR60X256	6592	8474	11290		60	198				84	8936
16SFTR84X256	9416	12109	N/A		80	222				108	9734


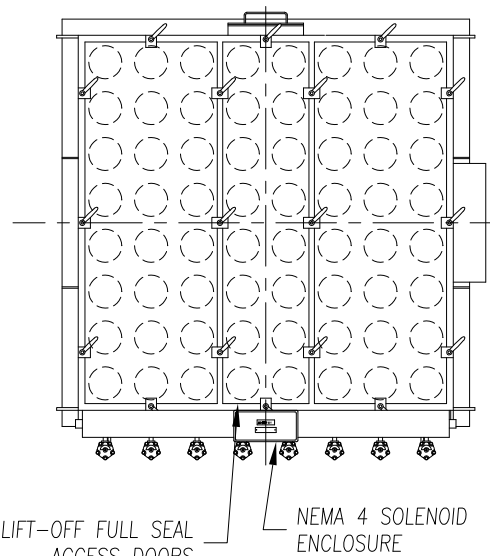


STANDARD FEATURES

1. ALL WELDED HEAVY-DUTY CONSTRUCTION
2. PRESSURE/VACUUM RATING: +/-20"W.C.
3. STANDARD MATERIALS OF CONSTRUCTION: CARBON STEEL, STAINLESS STEEL, ALUMINUM
4. STANDARD ELECTRICALS: NEMA 4 TIMER AND SOLENOID ENCLOSURES
5. PAINT: STANDARD IS WHITE OR ENVIROGREEN INDUSTRIAL ENAMEL

OPTIONAL FEATURES

1. STRUCTURAL SUPPORTS
2. SERVICE PLATFORMS
3. EXPLOSION VENTING
4. EXPLOSION-PROOF ELECTRICALS
5. HIGHER PRESSURE/VACUUM RATING
6. BIN VENT STYLE
7. WALK-IN CLEAN AIR PLENUM
8. WIDE CARTRIDGE SPACING

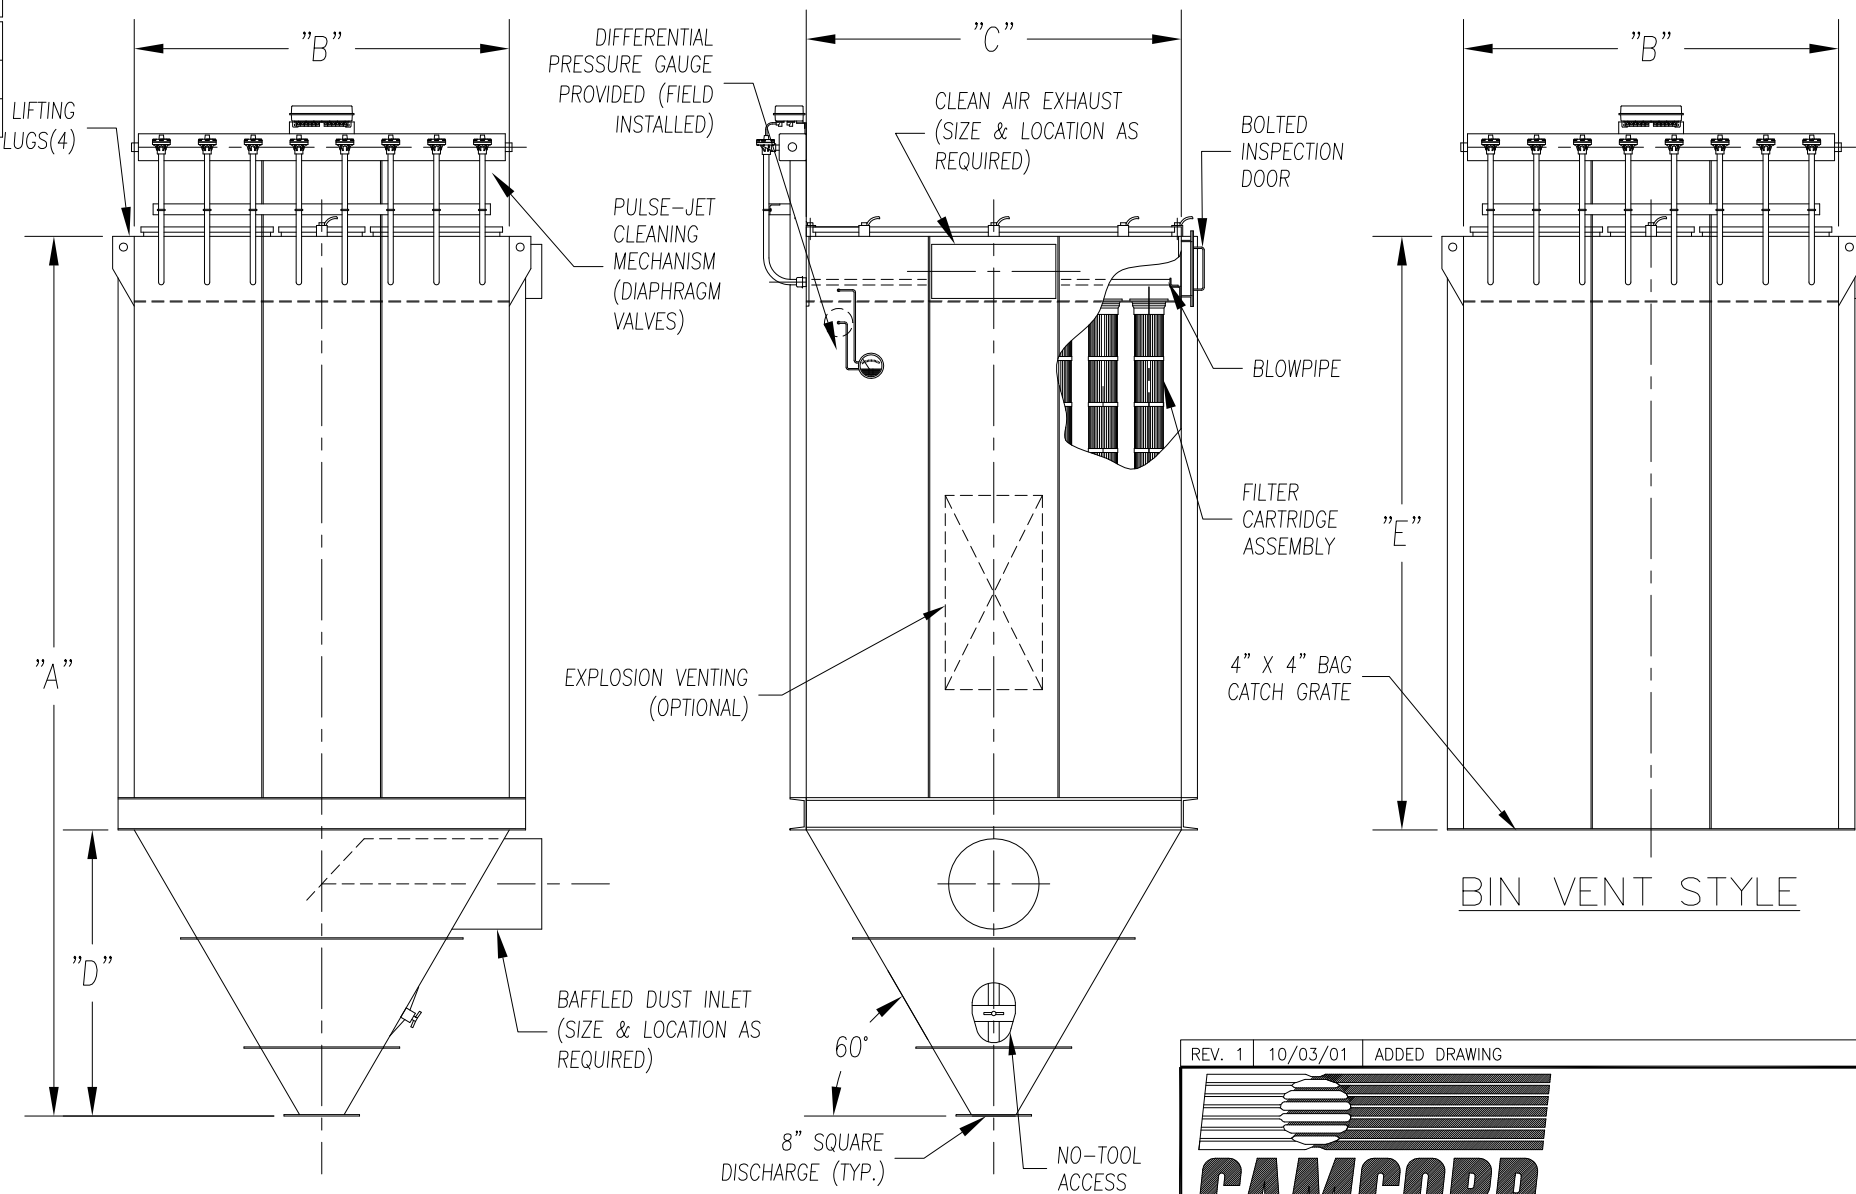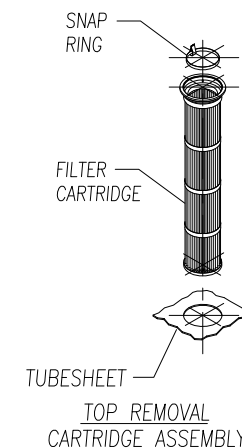

TOP REMOVAL CARTRIDGE DUST COLLECTOR (196 TO 256 CARTRIDGES)

REV. 1	10/03/01	ADDED DRAWING
9732 PFLUMM, LENEXA, KS 66215 PHONE: 913-831-0740 • FAX: 913-831-9271		
TITLE: TOP REMOVAL CARTRIDGE DUST COLLECTORS MODEL 14SFTR45X196-35P TO 16SFTR84X256-45P (196 TO 256 CARTRIDGE)		
DATE: 8-10-99	DRN BY: DES	DWG. NO.: CAT-TCA2-2
P.S.: 36-00	REV.: #1	