



HIGH INLET WITH INTERNAL BAFFLES

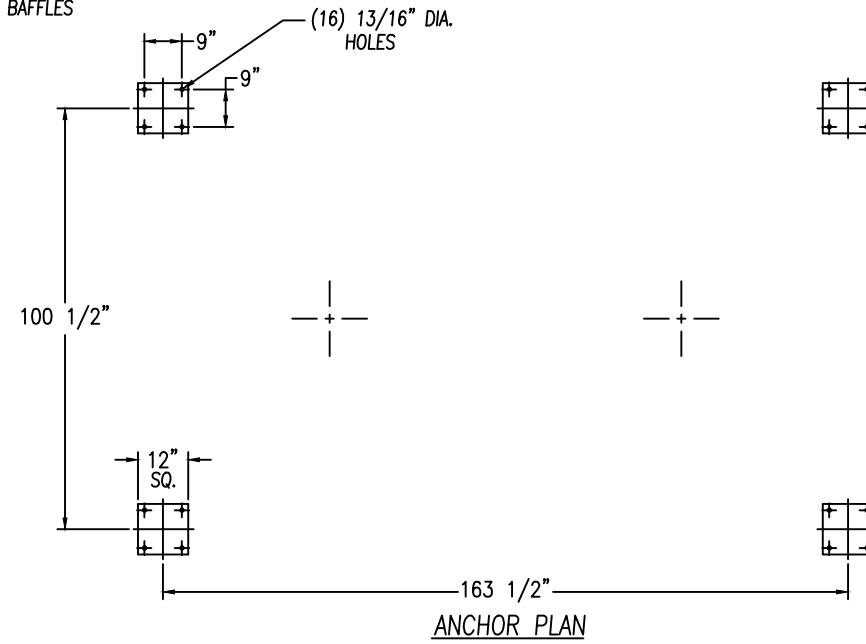

ANCHOR PLAN

**STANDARD FEATURES**

1. ALL WELDED HEAVY-DUTY CARBON STEEL CONSTRUCTION
2. HOUSING RATED FOR: +/-25" W.C.
3. INTERIOR DIRTY AIR PLENUM PRIMED ONLY
4. EXTERIOR PRIMED & FINISHED PAINTED WHITE INDUSTRIAL ENAMEL
5. (40) CARTRIDGE ELEMENTS FACTORY INSTALLED  
STANDARD 13,000 SQ.FT. OF 80/20 CELLULOSE/SYNTHETIC BLEND FILTER MEDIA  
OPTIONAL 9,800 SQ.FT. OF POLY-EL SPUN BOND POLYESTER FILTER MEDIA
6. APPROX. AIR CONSUMPTION OF 12.0 SCF PER VALVE PER PULSE OF CLEAN, DRY, OIL FREE COMPRESSED AIR AT 80-90 PSIG
7. NEMA 4 ELECTRICAL ENCLOSURES (TIMER ENCLOSURE SHIPS LOOSE FOR REMOTE MOUNTING)
8. 120/1/60 VAC REQUIRED
9. ESTIMATED INSTALLED WEIGHT = 10,400 LBS
10. SOME FIELD ASSEMBLY REQUIRED

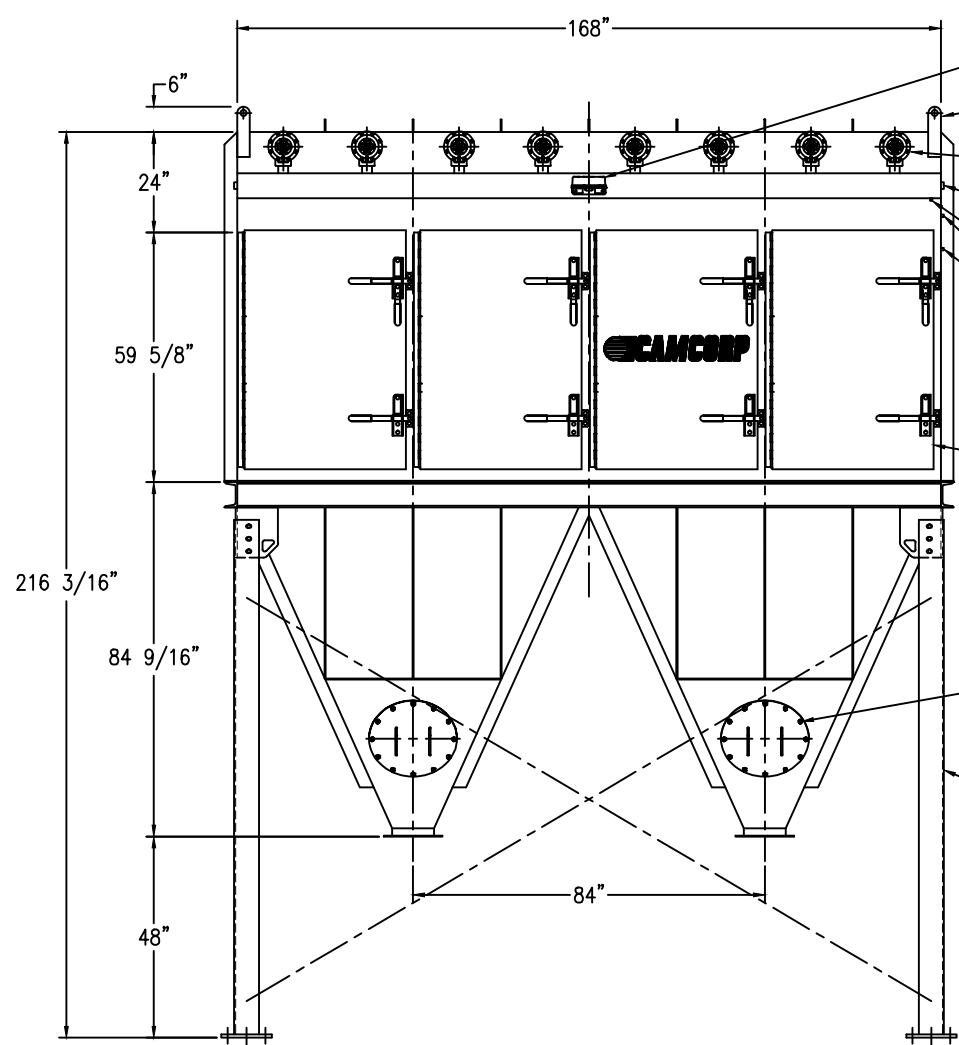

NEMA 4 SOLENOID ENCLOSURE

LIFTING LUGS(4)

2" DIAPHRAGM VALVES

1" NPT COMPRESSED AIR CONNECTION (EITHER END)

1/4" DRAIN PLUG


DIFFERENTIAL PRESSURE CONNECTIONS

HINGED ACCESS DOOR(S)

ON-DEMAND PULSE TIMER

18" ACCESS DOOR

SUPPORT LEGS & CROSS BRACING (OPTIONAL)

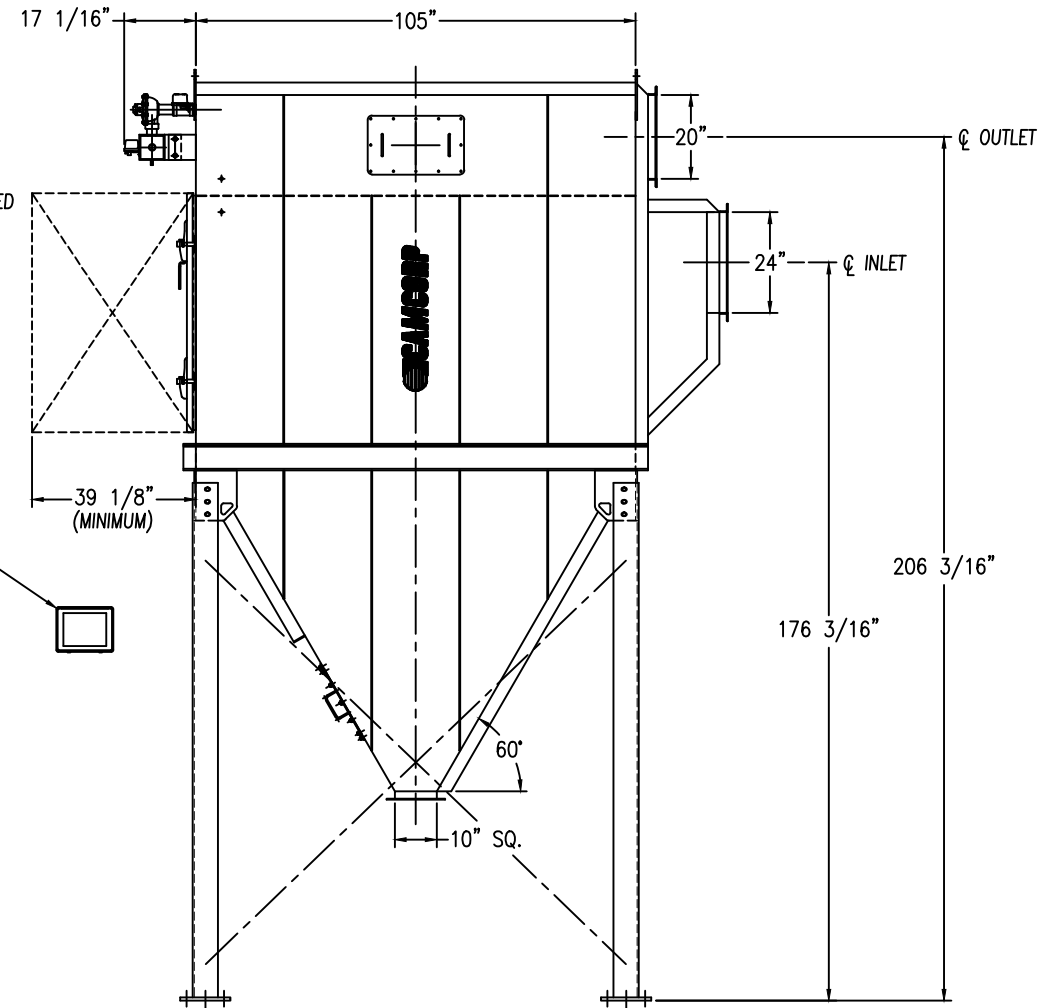


Ø OUTLET

Ø INLET

**OPTIONAL FEATURES**

1. STRUCTURAL SUPPORTS
2. SERVICE PLATFORMS
3. EXPLOSION VENTING
4. EXPLOSION-PROOF ELECTRICALS
5. HIGHER PRESSURE/VACUUM RATINGS
6. FILTER MEDIAS/PRE-FILTER OVERBAGS

REV 1	REISSUED	DB
 <b>CAMCORP</b> <small>CAMCORP INC.          PHONE: 913-831-0740 • FAX: 913-831-9271</small>		
TITLE: VERTICAL CARTRIDGE DUST COLLECTOR MODEL CA40-4D-MH		
DATE: 9/01/09	DRN BY: DB	DWG. NO.: CAT-CA40-4D-MH
P.S.:	REV.:	1