


HORIZONTAL STYLE
VACUUM BLOWER PACKAGE
(3 HP TO 75 HP)

STANDARD FEATURES

1. ROTARY LOBE POSITIVE DISPLACEMENT BLOWER (ROOTS, SUTORBILT, M-D, DUROFLOW)
2. 3 HP TO 75 HP MOTOR
3. STRUCTURAL BASE WITH MOTOR SLIDE BASE FOR BELT TENSIONING
4. V-BELT DRIVE (1.5 SAFETY FACTOR) AND OSHA BELT GUARD
5. INTAKE VACUUM AIR FILTER WITH REPLACEABLE FILTER ELEMENT
6. HORIZONTAL DISCHARGE SILENCER
7. 0-30" Hg LIQUID FILLED VACUUM GAUGE
8. DUAL SET POINT VACUUM SWITCH
9. VACUUM RELIEF VALVE
10. ALL COMPONENTS AND FRAME ARE PAINTED EITHER CAMCORP STANDARD WHITE OR ENVIROGREEN INDUSTRIAL ENAMEL WITH THE EXCEPTION OF THE BLOWER AND MOTOR WHICH ARE THE MANUFACTURERS STANDARD PAINT

OPTIONAL FEATURES

1. INLET SILENCER
2. DIFFERENTIAL PRESSURE SWITCH ON INLET FILTER
3. DIFFERENTIAL PRESSURE GAUGE ON THE INLET FILTER
4. SOUND ENCLOSURE WITH COOLING FAN AND EXTERNAL GAUGES AND INSTRUMENTS

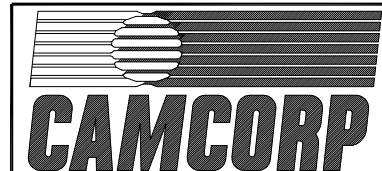

9732 PFLUMM, LENEXA, KS 66215

PHONE: 913-831-0740 • FAX: 913-831-9271

TITLE: VACUUM BLOWER PACKAGE - HORIZONTAL
(3 HP TO 75 HP)

DATE: 08/06/99	DRN BY: DOTY	DWG. NO.: CAT-VBP2	P.S.: 16-00	REV.:
-------------------	-----------------	-----------------------	----------------	-------