


CAMCORP MODELS 47WI8X752 TO 60WI12X960

MODEL NUMBER	FILTER MEDIA (SQ. FT.)	QUAN. OF BAGS	BAG LENGTH (IN FT.)	DIMENSIONS (INCHES)			EST. INSTALLED WT.
				A	B	C	
47WI8X752	9626	752	8	336	403	102	37909
47WI10X752	12032		10	384		126	38013
47WI12X752	14438		12	432		150	41711
48WI8X768	9830	768	8	336	411 1/2	102	33550
48WI10X768	12288		10	384		126	38772
48WI12X768	14746		12	432		150	42552
49WI8X784	10035	784	8	336	420	102	34103
49WI10X784	12544		10	384		126	39393
49WI12X784	15053		12	432		150	43224
50WI8X800	10240	800	8	336	428 1/2	102	34773
50WI10X800	12800		10	384		126	40100
50WI12X800	15360		12	432		150	43996
51WI8X816	10445	816	8	336	437	102	35414
51WI10X816	13056		10	384		126	40909
51WI12X816	15667		12	432		150	44887
52WI8X832	10650	832	8	336	445 1/2	102	36068
52WI10X832	13312		10	384		126	41631
52WI12X832	15974		12	432		150	45560
53WI8X848	10854	848	8	336	454	102	36727
53WI10X848	13568		10	384		126	42383
53WI12X848	16282		12	432		150	46479
54WI8X864	11059	864	8	336	462 1/2	102	37376
54WI10X864	13824		10	384		126	43142
54WI12X864	16589		12	432		150	47621
55WI8X880	11264	880	8	336	471	102	38038
55WI10X880	14080		10	384		126	43901
55WI12X880	16896		12	432		150	48145
56WI8X896	11469	896	8	336	479 1/2	102	38691
56WI10X896	14336		10	384		126	42623
56WI12X896	17203		12	432		150	48918
57WI8X912	11674	912	8	336	488	102	39331
57WI10X912	14592		10	384		126	45381
57WI12X912	17510		12	432		150	49758
58WI8X928	11878	928	8	336	496 1/2	102	39736
58WI10X928	14848		10	384		126	45793
58WI12X928	17818		12	432		150	50171
59WI8X944	12083	944	8	336	505	102	40390
59WI10X944	15104		10	384		126	46516
59WI12X944	18125		12	432		150	50943
60WI8X960	12288	960	8	336	513 1/2	102	41030
60WI10X960	15360		10	384		126	47275
60WI12X960	18432		12	432		150	51786

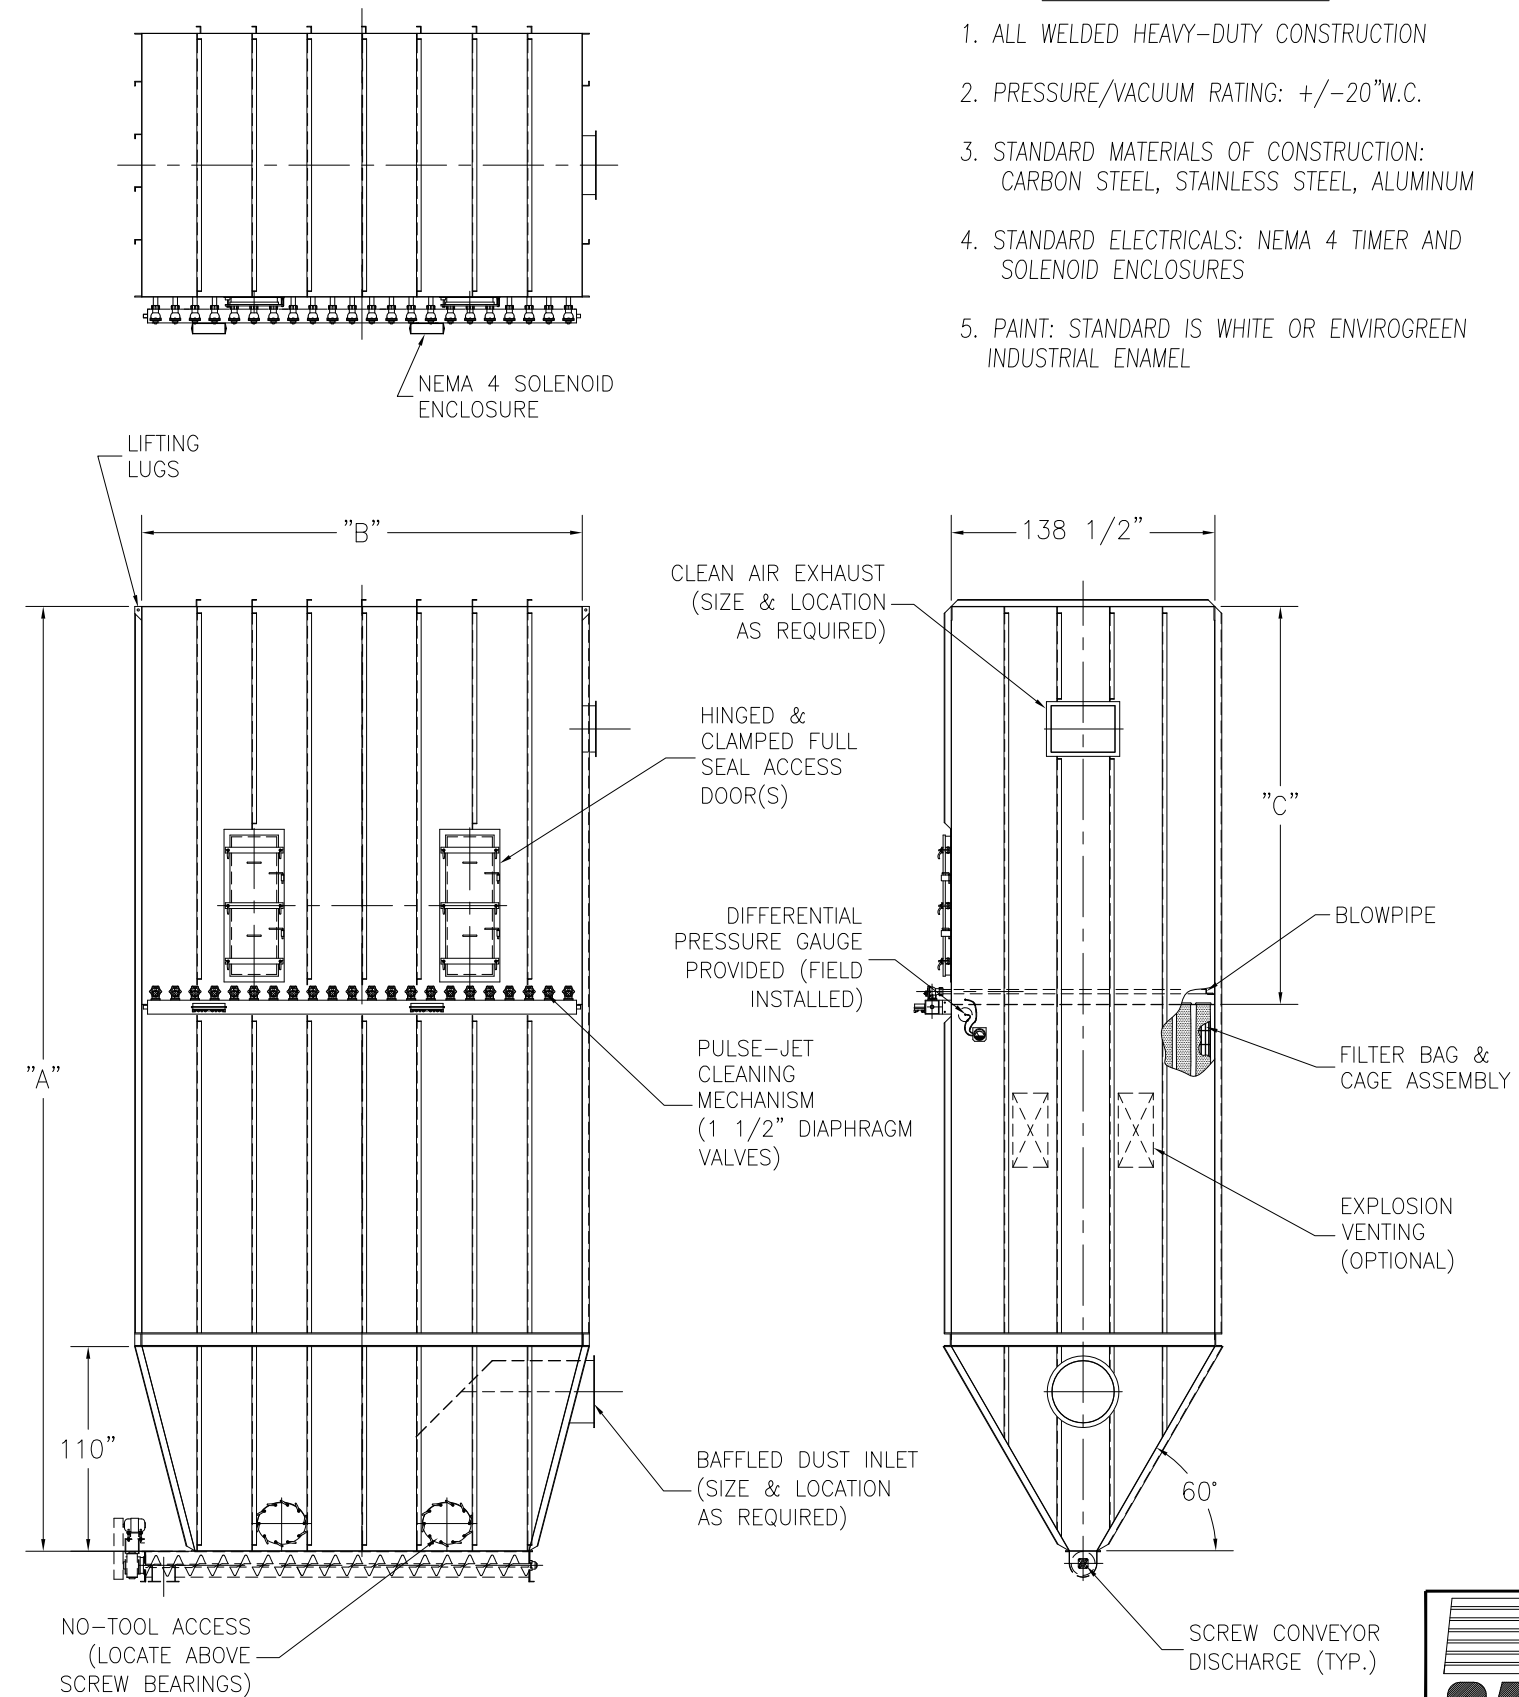

STANDARD FEATURES

1. ALL WELDED HEAVY-DUTY CONSTRUCTION
2. PRESSURE/VACUUM RATING: +/-20"W.C.
3. STANDARD MATERIALS OF CONSTRUCTION: CARBON STEEL, STAINLESS STEEL, ALUMINUM
4. STANDARD ELECTRICALS: NEMA 4 TIMER AND SOLENOID ENCLOSURES
5. PAINT: STANDARD IS WHITE OR ENVIROGREEN INDUSTRIAL ENAMEL

OPTIONAL FEATURES

1. STRUCTURAL SUPPORTS
2. SERVICE PLATFORMS
3. EXPLOSION VENTING
4. EXPLOSION-PROOF ELECTRICALS
5. HIGHER PRESSURE/VACUUM RATING

WALK-IN REMOVAL BAG
DUST COLLECTOR
(752 TO 960 BAGS)

9732 PFLUMM, LENEXA, KS. 66215 PHONE: 913-831-0740 FAX: 913-831-9271

TITLE: WALK-IN BAG REMOVAL DUST COLLECTORS
MODEL 47WI8X752 TO 60WI12X960 (752 TO 960 BAGS)

DATE: 10/31/01	DRN BY: DOTY	DWG. NO.: CAT-RWIOP-3	P.S.: 84-00	REV.:
-------------------	-----------------	--------------------------	----------------	-------