

NUMEROUS ORIENTATIONS - CONFIGURATIONS AVAILABLE

MODEL 6HVP48 THRU 12HVP504

MODEL NUMBER	FILTER MEDIA (SQ. FT.)	QUAN. OF BAGS	BAG LENGTH (IN. FT.)	MAT'L OF CONST.	DIMENSIONS (INCHES)										PD PUMP H.P.	# OF EXPLOSION VENTS	EST. INSTALLED WT./LBS.
					A	B	C	D	E	F	G	H	J	K			
6HVP48	348	48	6	12 GA.	60	316 5/16	95 1/4	110	17 11/16	118 11/16	20	35	40 1/8	1"	3 HP	1 *	5095
8HVP48	464		8			364 5/16	119 1/4	134									
10HVP48	581		10			412 5/16	143 1/4	158									
6HVP80	580	80	6	12 GA.	72	332 5/16	95 1/4	114	28 1/16	131 1/16	24	42	48 5/8	1"	3 HP	1	5681
8HVP80	774		8			380 5/16	119 1/4	138									
10HVP80	968		10			428 5/16	143 1/4	162									
8HVP112	1084	112	8	10 GA.	84	396 5/16	119 1/4	142	38 1/2	143 1/2	28	49	57 1/16	1"	3 HP	1	7943
10HVP112	1355		10			444 5/16	143 1/4	166									
12HVP112	1626		12			468 5/16	143 1/4	190									
8HVP152	1471	152	8	10 GA.	96	412 5/16	119 1/4	146	48 7/8	155 7/8	32	56	65 9/16	1-1/2"	3 HP	2	9092
10HVP152	1839		10			460 5/16	143 1/4	170									
12HVP152	2207		12			484 5/16	143 1/4	194									
8HVP200	1936	200	8	10 GA.	108	428 5/16	119 1/4	150	59 1/4	168 1/4	36	63	72 9/16	1-1/2"	5 HP	2	11036
10HVP200	2420		10			476 5/16	143 1/4	174									
12HVP200	2904		12			500 5/16	143 1/4	198									
8HVP256	2478	256	8	10 GA.	120	444 5/16	119 1/4	154	69 11/16	180 11/16	40	70	81 1/16	1-1/2"	5 HP	3	12350
10HVP256	3097		10			492 5/16	143 1/4	178									
12HVP256	3717		12			516 5/16	143 1/4	202									
8HVP312	3020	312	8	10 GA.	132	460 5/16	119 1/4	158	80 1/16	193 1/16	44	77	89 9/16	2"	7.5 HP	3	13908
10HVP312	3775		10			508 5/16	143 1/4	182									
12HVP312	4530		12			532 5/16	143 1/4	206									
8HVP368	3562	368	8	10 GA.	144	476 5/16	119 1/4	162	90 7/16	205 7/16	48	84	98 1/16	2"	7.5 HP	4	15437
10HVP368	4452		10			524 5/16	143 1/4	186									
12HVP368	5343		12			548 5/16	143 1/4	210									
8HVP432	4182	432	8	3/16" R	156	492 5/16	119 1/4	166	100 13/16	217 13/16	52	91	106 7/16	2"	10 HP	4	19826
10HVP432	5227		10			540 5/16	143 1/4	190									
12HVP432	6273		12			564 5/16	143 1/4	214									
8HVP504	4879	504	8	3/16" R	168	508 5/16	119 1/4	170	111 1/4	230 1/4	56	98	114 15/16	2"	10 HP	5	21858
10HVP504	6098		10			556 5/16	143 1/4	194									
12HVP504	7318		12			580 5/16	143 1/4	218									


\* 24" SQUARE EXPLOSION VENT(S) ON HVP48 MODELS

STANDARD FEATURES

1. ALL WELDED HEAVY-DUTY CONSTRUCTION
2. PRESSURE/VACUUM RATING: +/-20"W.C.
3. STANDARD MATERIALS OF CONSTRUCTION: CARBON STEEL, STAINLESS STEEL, ALUMINUM
4. PAINT IS STANDARD WHITE OR ENVIROGREEN INDUSTRIAL ENAMEL
5. STANDARD NUMBER OF EXPLOSION VENTS PROVIDE A 65 : 1 VENT RATIO
6. 1/2 HP MOTOR ROTATES INTERNAL CLEANING MECHANISM

OPTIONAL FEATURES

1. INTERMEDIATE SERVICE PLATFORMS
2. EXPLOSION VENTING / RATIOS
3. EXPLOSION-PROOF ELECTRICALS
4. HIGHER PRESSURE/VACUUM RATING
5. BIN VENT STYLE

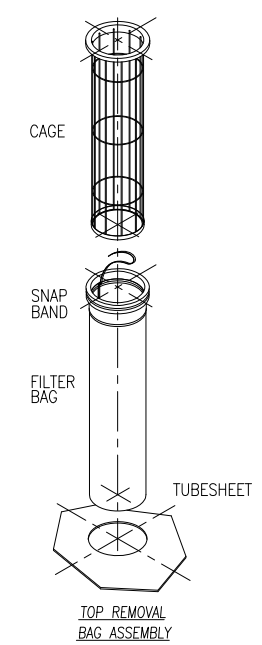

REV	DRAWING STATUS	BY	DATE
9732 PFLUMM, LENEXA, KS 66215 PHONE: 913-831-0740 FAX: 913-831-9271			
This drawing and the solutions/designs are the property of CAMCORP, Inc. and are furnished only for informational purposes on a confidential basis. Reproduction, publishing, or other disclosures are on a "NEED TO KNOW" basis only. Any other reproduction requires written authorization by a corporate officer.			
TITLE: HVP (HIGH VOLUME PULSE) DUST COLLECTOR WITH INVOLUTE INLET			
DATE:	DRAWN:	DRAWING NUMBER:	REVISION:
9/29/06	CK	HVP-INV	